

1 SB 3-35 M





: 97686700

SB




- (1 mm)
- (1 mm).
- : 273 .. 40 °C
- Liquid temperature during operation: 293 K
- : 998.2 kg/m³
- : 2.76 m³/h
- : 25.2 m
- : 102 mm
- : 1 mm
- : 1
- : ISO9906:2012 3B
- : PP30GF
- : PPO20GF
- : 323 K
- : G 1"
- : 10 m
- P2: 13 µF
- : 0.74 kW
- : 50 Hz
- : 1 x 220-240 V
- : 3.8 A
- : 12 A
- Cos phi: 0.94
- : 2800 rpm
- : 13 µF/450 V
- (IEC 34-5): IP68
- (IEC 85): F
- : 15 m
- : H07RN-F 3G1
- : SCHUKO

: 9.22 kg
: 9.95 kg
: 0.022 m3

97686700 SB 3-35 M 50 Hz

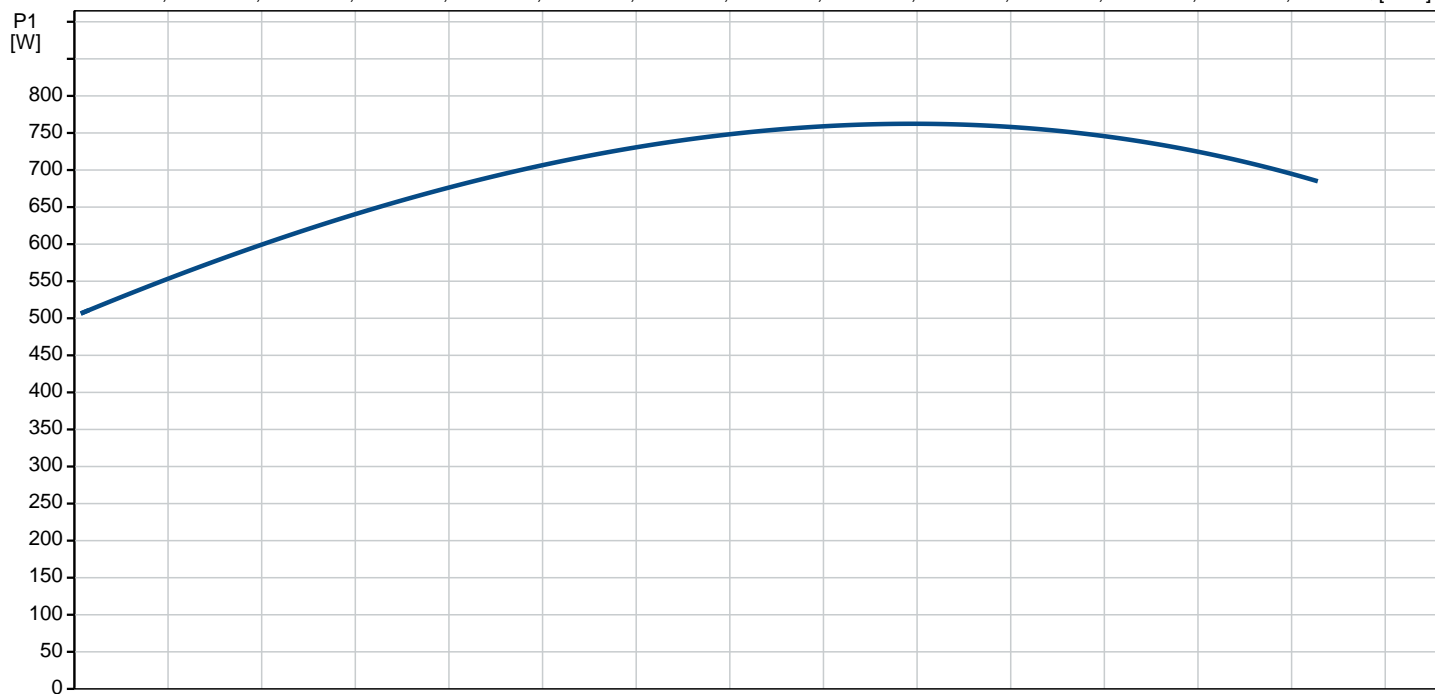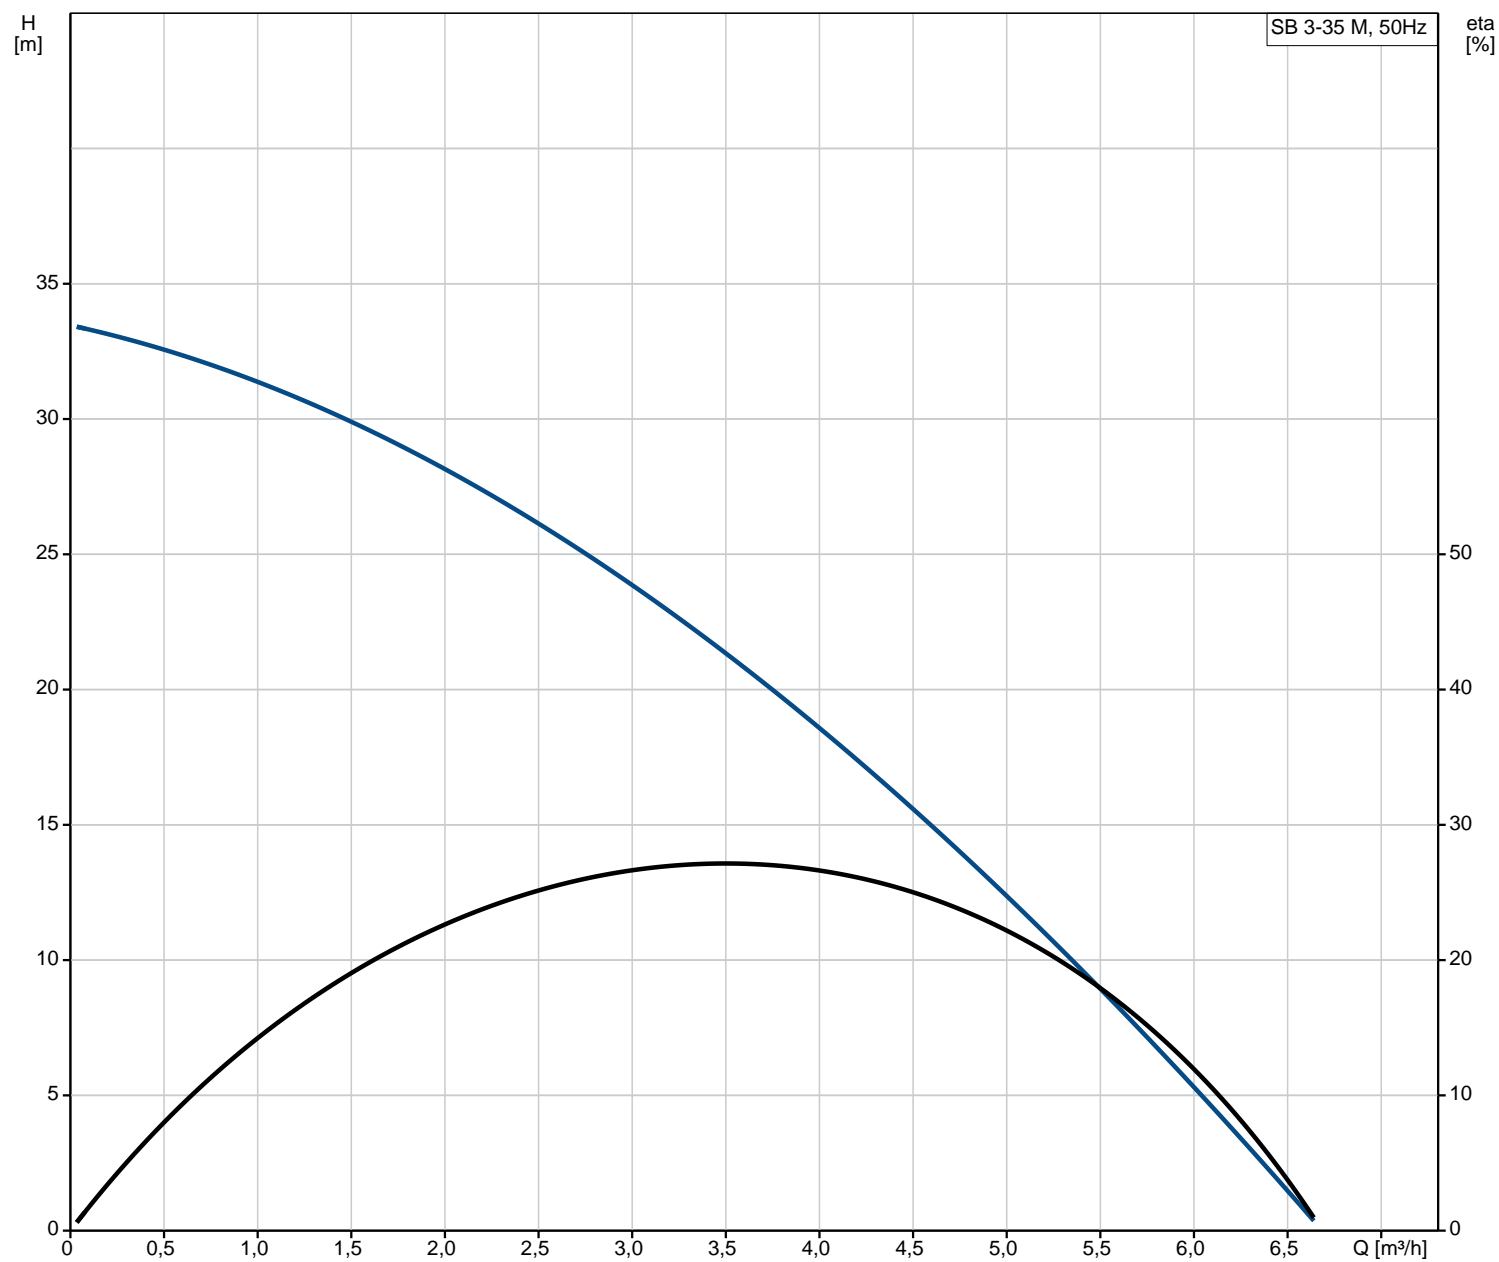

No.:	SB 3-35 M
EAN	97686700
	5710621504119
	2.76 m ³ /h
	25.2 m
	102 mm
	3
	1 mm
	1
	ISO9906:2012 3B
	PP30GF
	PPO20GF
	323 K
	G 1"
	10 m
	273 .. 40 °C
Liquid temperature during operation:	293 K
	998.2 kg/m ³
	4-9
	13 µF
P2:	0.74 kW
	50 Hz
	1 x 220-240 V
	3.8 A
	12 A
Cos phi:	0,94
	2800 rpm
	13 µF/450 V
(IEC 34-5):	IP68
(IEC 85):	F
	15 m
	H07RN-F 3G1
	SCHUKO
	N
	9.22 kg
	9.95 kg
	0.022 m ³

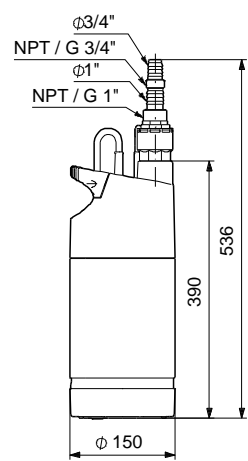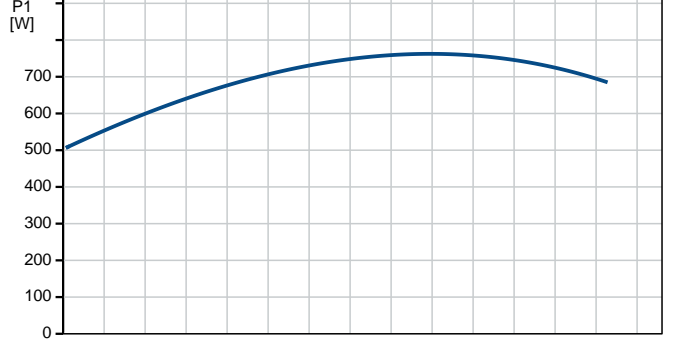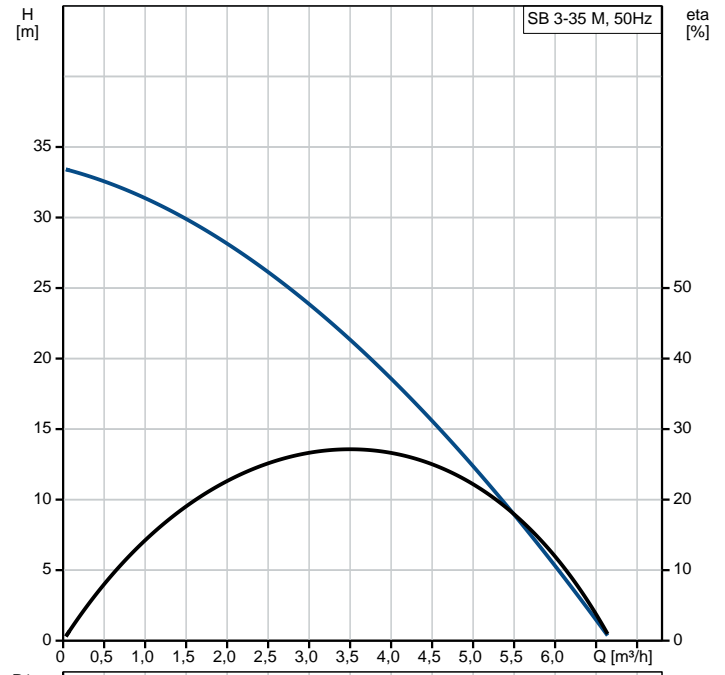

97686700 SB 3-35 M 50 Hz

